





coolMaster Hose

877-332-6656 | sales@coolmasterhose.com

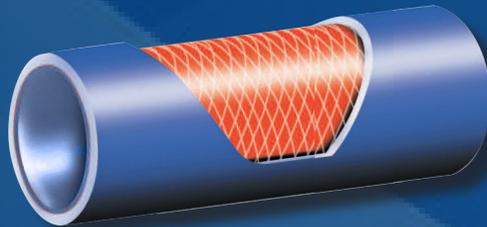

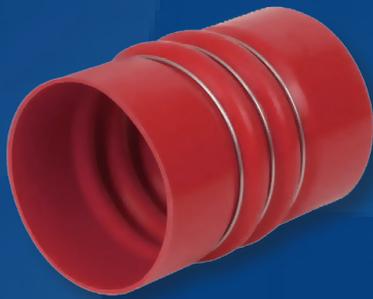

coolMaster Hose

- Overview of Products3
- Straight Coolant Hose4
- Straight Coolant Hose with Wire5
- Shaped Coolant Hose6
- Straight Coolant Hose (EPDM - Textured).....7
- Shaped Coolant Hose (EPDM - Textured).....8
- Straight Heater Hose9
- Vacuum Tube9
- Charge-Air Cooler Hose (Hot Side).....10
- Charge-Air Cooler Hose Reducer (Hot Side).....10
- Charge-Air Cooler Hose (Cold Side).....11
- Charge-Air Cooler Reducer (Cold Side).....11
- Straight Turbo Sleeve12

Silicone Heater Hose

- **Extruded heater hoses** meet or exceed the requirements of the SAE J20 R3 Class A specification
- **Silicone hoses** are reinforced with polyester fabric
- **Aramid fiber reinforcement** is available for high temperature applications up to +500°F
- Resistant to coolant solutions, cold leaks, cracking, peeling, aging and ozone
- **CAC hoses** are available in straight, shaped, stepped and convoluted forms.
- **Convoluted forms** are the most commonly used and provide excellent performance and economy.




Applications

- Standard equipment on trucks, cars and buses
- Not recommended for fuel or oil transfer use.

Available in:

- 1-Ply
- 2-Ply
- 3-Ply
- 4-Ply

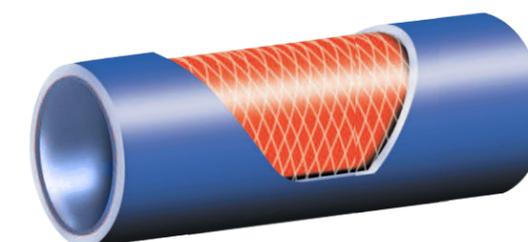



Straight Coolant Hose

Available in 3ft 6ft and 12ft

COOLMASTER 100 SERIES: STRAIGHT COOLANT HOSE (SILICONE – GLOSSY)											
no of Plies	Part No	Hose ID		Wall thickness		Outer Diameter		Burst Pressure (Mpa)		Burst Pressure (PSI)	
		MM	INCH	MM	INCH	MM	INCH	Specification	Actual	Specification	Actual
3	100-039	10	0.39	4.95	0.19	19.9	0.78	3.29	4.23	477	614
3	100-050	13	0.50	4.95	0.19	22.9	0.9	2.93	3.05	425	442
3	100-063	16	0.63	4.95	0.19	25.9	1.02	2.59	2.99	376	434
3	100-075	19	0.75	4.95	0.19	28.9	1.14	2.24	2.45	325	355
4	100-087	22	0.87	4.95	0.19	31.9	1.26	2.24	2.32	325	336
4	100-100	25	1.00	4.95	0.19	34.9	1.37	2.06	2.28	299	331
4	100-114	29	1.14	4.95	0.19	38.9	1.53	2.06	2.16	299	313
4	100-125	32	1.26	4.95	0.19	41.9	1.65	1.90	1.98	276	287
4	100-138	35	1.38	4.95	0.19	44.9	1.77	1.90	1.92	276	278
4	100-150	38	1.50	4.95	0.19	47.9	1.89	1.72	1.86	249	270
4	100-161	41	1.61	4.95	0.19	50.9	2.00	1.72	1.78	249	258
4	100-175	44	1.73	4.95	0.19	53.9	2.12	1.55	1.62	225	235
4	100-188	48	1.88	4.95	0.19	57.1	2.25	1.38	1.60	200	232
4	100-200	51	2.00	5.5	0.22	62	2.44	1.38	1.59	200	200
4	100-213	54	2.13	4.95	0.19	65	2.56	1.38	1.52	200	230
4	100-225	57	2.24	4.95	0.19	66.9	2.63	1.21	1.32	175	191
4	100-236	60	2.36	4.95	0.19	69.9	2.75	1.21	1.26	175	182
4	100-250	64	2.50	4.95	0.19	73.9	2.91	1.03	1.14	149	165
4	100-263	67	2.63	4.95	0.19	76.7	3.02	1.03	1.12	149	162
4	100-275	70	2.76	4.95	0.19	79.9	3.15	0.86	1.10	125	160
4	100-288	73	2.88	4.95	0.19	83.05	3.27	0.86	1.08	125	156
4	100-300	76	3.00	4.95	0.19	85.9	3.38	0.60	0.95	87	138
4	100-325	83	3.27	4.95	0.19	92.9	3.66	0.60	0.84	87	122
4	100-350	89	3.50	4.95	0.19	98.9	3.89	0.52	0.75	75	108
4	100-375	95	3.75	4.95	0.19	105.15	4.14	0.52	0.72	75	104
5	100-400	102	4.00	5.5	0.22	113	4.45	0.34	0.63	49	92



Straight Coolant Hose With Wire

Available in 3ft 6ft and 12ft

COOLMASTER 200 SERIES: STRAIGHT COOLANT HOSE WITH WIRE (SILICONE – GLOSSY)											
Sr. No	Part Number	Hose Inner Diameter		Outer Diameter		Burst Pressure (Mpa)		Burst Pressure (PSI)		Vacuum Pressure (Kpa)	
		MM	INCH	MM	INCH	Specification	Actual	Specification	Actual	Specification	Actual
1	200-039	10	0.39	19.9	0.78	2.06	5.03	299	730	84.4	> 92
2	200-050	13	0.50	22.9	0.90	2.06	4.97	299	721	84.4	> 92
3	200-063	16	0.63	25.9	1.02	2.06	3.81	299	553	84.4	> 92
4	200-075	19	0.75	28.9	1.14	2.06	3.72	299	540	84.4	> 92
5	200-087	22	0.87	31.9	1.26	2.06	3.23	299	468	84.4	> 92
6	200-100	25	1.00	34.9	1.37	2.06	2.84	299	412	84.4	> 92
7	200-114	29	1.14	38.9	1.53	1.90	2.82	276	409	84.4	> 92
8	200-125	32	1.26	41.9	1.65	1.90	2.77	276	402	84.4	> 92
9	200-138	35	1.38	44.9	1.77	1.90	2.42	276	351	84.4	> 92
10	200-150	38	1.50	47.9	1.89	1.72	2.28	249	331	84.4	> 92
11	200-161	41	1.61	50.9	2.00	1.72	2.07	249	300	84.4	> 92
12	200-175	44	1.73	53.9	2.12	1.55	1.87	225	271	84.4	> 92
13	200-200	51	2.00	60.9	2.40	1.38	1.55	200	225	84.4	> 92
14	200-225	57	2.24	66.9	2.63	1.21	1.42	175	206	84.4	> 92
15	200-236	60	2.36	69.9	2.75	1.21	1.38	175	200	84.4	> 92
16	200-250	64	2.50	73.9	2.91	1.03	1.36	149	197	84.4	> 92
17	200-275	70	2.76	79.9	3.15	0.86	1.28	125	186	84.4	> 92
18	200-300	76	3.00	85.9	3.38	0.69	1.12	100	162	84.4	> 92
19	200-325	83	3.27	92.9	3.66	0.52	1.08	75	157	84.4	> 92
20	200-350	89	3.50	98.9	3.89	0.52	1.06	75	154	84.4	> 92
21	200-400	102	4.00	111.9	4.41	0.34	0.94	49	136	84.4	> 92



Shaped Coolant Hose

COOLMASTER- 300 SERIES: SHAPED COOLANT HOSE (SILICONE – GLOSSY)													
Sr.	Part No	Hose ID		Arm Length		Wall thickness		Outer Diameter		Burst Pressure as per SAE J20 (Heavy-Duty standard wall)		Burst Pressure as per SAE J20 (Heavy-Duty standard wall)	
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	(Mpa)		(PSI)	
										Specification	Actual	Specification	Actual
1	300-039-060	10	0.39	152.4	6	4.95	0.19	19.9	0.78	3.29	3.8	477	551
2	300-050-060	13	0.5	152.4	6	4.95	0.19	22.9	0.9	2.93	3	425	435
3	300-063-060	16	0.63	152.4	6	4.95	0.19	25.9	1.02	2.59	3.11	376	451
4	300-075-060	19	0.75	152.4	6	4.95	0.19	28.9	1.14	2.24	2.64	325	383
5	300-087-060	22	0.87	152.4	6	4.95	0.19	31.9	1.26	2.24	2.35	325	340
6	300-100-060	25	1	152.4	6	4.95	0.19	34.9	1.37	2.06	2.26	299	327
7	300-114-060	29	1.14	152.4	6	4.95	0.19	38.9	1.53	2.06	2.1	299	305
8	300-125-060	32	1.25	152.4	6	4.95	0.19	41.9	1.65	1.90	2	276	290
9	300-138-060	35	1.38	152.4	6	4.95	0.19	44.9	1.77	1.90	1.98	276	287
10	300-150-060	38	1.5	152.4	6	4.95	0.19	47.9	1.89	1.72	1.94	249	281
11	300-161-060	41	1.61	152.4	6	4.95	0.19	50.9	2	1.72	1.92	249	278
12	300-175-060	44	1.73	152.4	6	4.95	0.19	53.9	2.12	1.55	1.89	225	274
13	300-200-060	51	2	152.4	6	4.95	0.22	60.9	2.4	1.38	1.6	200	200
14	300-225-060	57	2.24	152.4	6	4.95	0.19	66.9	2.63	1.21	1.28	175	186
15	300-236-060	60	2.36	152.4	6	4.95	0.19	69.9	2.75	1.21	1.24	175	180
16	300-250-060	64	2.5	152.4	6	4.95	0.19	73.9	2.91	1.03	1.17	149	169
17	300-275-070	70	2.76	177.8	7	4.95	0.19	79.9	3.15	0.86	1.1	125	160
18	300-300-075	76	3	190.5	7.5	4.95	0.19	85.9	3.38	0.60	1.08	87	157
19	300-325-075	83	3.27	190.5	7.5	4.95	0.19	92.9	3.66	0.60	0.93	87	135
20	300-350-085	89	3.5	215.9	8.5	4.95	0.19	98.9	3.89	0.52	0.9	75	100
21	300-400-095	102	4	241.3	9.5	5.5	0.22	113	4.45	0.34	0.61	49	88
22	300-500-095	127	5	241.3	9.5	5.5	0.22	138	5.43	0.34	0.52	49	75



Straight Coolant Hose

Available in 3ft 6ft and 12ft

COOLMASTER- 400 SERIES: STRAIGHT COOLANT HOSE (EPDM - TEXTURED)											
Sr No	Part #	Inner Diameter		Wall thickness		Outer Diameter		Required Burst pressure as per SAE J20 R1 heavy-duty standard wall		Actual Burst pressure	
		MM	INCH	MM	INCH	MM	INCH	(Mpa)		(PSI)	
								Specification	Actual	Specification	Actual
1	400-039	10	0.39	4.95	0.19	19.9	0.75	3.29	3.5	477	508
2	400-050	13	0.5	4.95	0.19	22.6	0.85	2.93	3.3	425	479
3	400-063	16	0.63	4.95	0.19	25.9	0.98	2.59	2.9	376	421
4	400-075	19	0.75	4.95	0.19	28.9	1.1	2.24	2.4	325	348
5	400-087	22	0.87	4.95	0.19	31.9	1.18	2.24	2.4	325	348
6	400-100	25	1	4.95	0.19	34.9	1.34	2.06	2.2	299	319
7	400-110	28	1.1	4.95	0.19	37.9	1.46	2.06	2.2	299	319
8	400-118	30	1.18	4.95	0.19	39.9	1.54	1.9	2	276	290
9	400-125	32	1.26	4.95	0.19	41.9	1.61	1.9	2	276	290
10	400-138	35	1.38	4.95	0.19	44.9	1.73	1.9	2	276	290
11	400-150	38	1.5	4.95	0.19	47.9	1.85	1.72	1.9	249	276
12	400-165	42	1.65	4.95	0.19	51.9	2.01	1.72	1.8	249	261
13	400-175	45	1.77	4.95	0.19	54.9	2.13	1.55	1.65	225	239
14	400-200	51	2	4.95	0.19	60.9	2.36	1.38	1.45	200	210
15	400-216	55	2.16	4.95	0.19	64.9	2.52	1.21	1.32	175	191
16	400-225	57	2.24	4.95	0.19	66.9	2.6	1.21	1.28	175	186
17	400-236	60	2.36	4.95	0.19	69.9	2.72	1.21	1.25	175	181
18	400-250	63	2.5	4.95	0.19	72.9	2.83	1.03	1.15	149	167
19	400-263	67	2.63	4.95	0.19	76.6	2.98	1.03	1.1	149	160
20	400-275	70	2.76	4.95	0.19	79.9	3.11	0.86	0.95	125	138
21	400-287	73	2.87	4.95	0.19	82.9	3.23	0.86	0.9	125	131
22	400-300	76	3	4.95	0.19	85.9	3.35	0.6	0.85	87	123
23	400-325	83	3.27	4.95	0.19	92.9	3.62	0.6	0.72	87	104
24	400-350	89	3.5	4.95	0.19	98.9	3.86	0.52	0.65	75	94
25	400-375	95	3.74	4.95	0.19	104.9	4.09	0.52	0.6	75	87
26	400-400	102	4	4.95	0.19	111.9	4.37	0.34	0.55	49	80
27	400-450	114	4.49	4.95	0.19	123.9	4.84	0.34	0.45	49	65
28	400-500	127	5	4.95	0.19	136.9	5.35	0.34	0.4	49	58
29	400-600	152	6	4.95	0.19	161.9	6.34	0.34	0.38	49	55



Shaped Coolant Hose

COOLMASTER 500 SERIES: SHAPED COOLANT HOSE (EPDM - TEXTURED)													
Sr No	Part Number	Inner Diameter		Arm length		Wall thickness		Outer Diameter		Required Burst pressure as per SAE J20 (heavy duty standard wall)		Actual Burst pressure	
		MM	INCH	MM	INCH	MM	INCH	MM	INCH	(Mpa)		(PSI)	
											Specification	Actual	Specification
1	500-039-060	10	0.39	152.4	6	4.95	0.19	19.9	0.78	3.29	3.4	477	493
2	500-050-060	13	0.5	152.4	6	4.95	0.19	22.6	0.89	2.93	3.25	425	471
3	500-063-060	16	0.63	152.4	6	4.95	0.19	25.9	1.02	2.59	2.86	376	415
4	500-075-060	19	0.75	152.4	6	4.95	0.19	28.9	1.14	2.24	2.38	325	345
5	500-087-060	22	0.87	152.4	6	4.95	0.19	31.9	1.26	2.24	2.35	325	341
6	500-100-060	25	1	152.4	6	4.95	0.19	34.9	1.37	2.06	2.16	299	313
7	500-110-060	28	1.1	152.4	6	4.95	0.19	37.9	1.49	2.06	2.15	299	312
8	500-118-060	30	1.18	152.4	6	4.95	0.19	39.9	1.57	1.9	1.98	276	287
9	500-125-060	32	1.26	152.4	6	4.95	0.19	41.9	1.65	1.9	1.98	276	287
10	500-138-060	35	1.38	152.4	6	4.95	0.19	44.9	1.77	1.9	1.98	276	287
11	500-150-060	38	1.5	152.4	6	4.95	0.19	47.9	1.89	1.72	1.87	250	271
12	500-165-060	42	1.65	152.4	6	4.95	0.19	51.9	2.04	1.72	1.78	250	258
13	500-175-060	45	1.77	152.4	6	4.95	0.19	54.9	2.16	1.55	1.64	225	238
14	500-200-060	51	2	152.4	6	4.95	0.19	60.9	2.4	1.38	1.43	200	207
15	500-216-060	55	2.16	152.4	6	4.95	0.19	64.9	2.56	1.21	1.3	176	189
16	500-225-060	57	2.24	152.4	6	4.95	0.19	66.9	2.63	1.21	1.28	176	186
17	500-236-060	60	2.36	152.4	6	4.95	0.19	69.9	2.75	1.21	1.24	176	180
18	500-250-060	63	2.5	152.4	6	4.95	0.19	72.9	2.87	1.03	1.13	149	164
19	500-263-060	67	2.63	152.4	6	4.95	0.19	76.6	3.02	1.03	1.1	149	160
20	500-275-060	70	2.76	152.4	6	4.95	0.19	79.9	3.15	0.86	0.93	125	135
21	500-287-060	73	2.87	152.4	6	4.95	0.19	82.9	3.26	0.86	0.9	125	131
22	500-300-060	76	3	152.4	6	4.95	0.19	85.9	3.38	0.6	0.8	87	116
23	500-325-060	83	3.27	152.4	6	4.95	0.19	92.9	3.66	0.6	0.7	87	102
24	500-350-060	89	3.5	152.4	6	4.95	0.19	98.9	3.89	0.52	0.63	75	91
25	500-375-060	95	3.74	152.4	6	4.95	0.19	104.9	4.13	0.52	0.6	75	87
26	500-400-060	102	4	152.4	6	4.95	0.19	111.9	4.41	0.34	0.53	49	77
27	500-450-060	114	4.49	152.4	6	4.95	0.19	123.9	4.88	0.34	0.44	49	64
28	500-500-060	127	5	152.4	6	4.95	0.19	136.9	5.39	0.34	0.39	49	57
29	500-600-060	152	6	152.4	6	4.95	0.19	161.9	6.37	0.34	0.38	49	55



Straight Heater Hose

Available in 25ft (Boxes), 50ft (Boxes), 100ft (Reels), & 150ft (Reels) lengths

COOLMASTER - 600 SERIES: STRAIGHT HEATER HOSE (SILICONE - GLOSSY)											
Sr. No	Part No	Hose ID		Wall thickness		Outer Diameter		Burst Pressure (Mpa)		Burst Pressure (PSI)	
		MM	INCH	MM	INCH	MM	INCH	Specification	Actual	Specification	Actual
		1	600-025	6	0.24	4.2	0.17	14.4	0.57	1.72	2.2
2	600-031	8	0.31	4.2	0.17	16.4	0.65	1.72	2.1	249	305
3	600-039	10	0.39	4.2	0.17	18.4	0.72	1.72	2.1	249	305
4	600-050	13	0.5	4.2	0.17	21.4	0.84	1.72	2.1	249	305
5	600-063	16	0.63	4.2	0.17	24.4	0.96	1.72	2.0	249	290
6	600-075	19	0.75	4.2	0.17	27.4	1.08	1.38	2.0	200	290
7	600-087	22	0.87	4.2	0.17	30.4	1.2	1.21	1.7	175	247
8	600-100	25	1	4.2	0.17	33.4	1.31	1.21	1.7	175	247
9	600-125	32	1.25	4.2	0.17	40.4	1.59	1.21	1.4	175	203



Vacuum Tube

Available in 25ft (Boxes) length

COOLMASTER -700 SERIES: VACUUM TUBE (SILICONE - GLOSSY)							
Sr. No	Part No	Inner Diameter		Wall thickness		Outer Diameter	
		MM	INCH	MM	INCH	MM	INCH
1	700-013	3.18	0.13	1.5	0.06	6.18	0.24
2	700-019	4.75	0.19	2.5	0.1	9.75	0.38
3	700-025	6.35	0.25	2.5	0.1	11.35	0.45
4	700-031	7.92	0.31	3	0.12	13.92	0.55
5	700-038	9.53	0.4	4	0.16	17.53	0.69



Charge-Air Cooler Hose (Hot Side)

COOLMASTER - 800H SERIES: CHARGE-AIR-COOLER HOSES (HOT SIDE)											
Sr. No	Part #	Inner Diameter		Outer Diameter		Length		# of Convolutes (Humps)	# of SS rings	Max. Working Pressure (Mpa)	Max Working Pressure (PSI)
		MM	INCH	MM	INCH	MM	INCH				
1	800H250-060	63.5	2.5	70	2.74	152.4	6	2	3	0.41	60
2	800H300-060	76.2	3	82	3.24	152.4	6	2	3	0.41	60
3	800H350-060	88.9	3.5	95	3.74	152.4	6	2	3	0.38	55
4	800H350-075	88.9	3.5	95	3.74	190.5	7.5	2	3	0.38	55
5	800H400-060	101.6	4	108	4.24	152.4	6	2	3	0.34	50
6	800H400-065	101.6	4	108	4.24	165.1	6.5	2	3	0.34	50
7	800H400-070	101.6	4	108	4.24	177.8	7	2	3	0.34	50
8	800H400-075	101.6	4	108	4.24	190.5	7.5	2	3	0.34	50
9	800H400-080	101.6	4	108	4.24	203.2	8	2	3	0.34	50
10	800H450-060	114.3	4.5	120	4.74	152.4	6	2	3	0.31	45
11	800H500-060	127	5	133	5.24	152.4	6	2	3	0.24	35

Note : Our CAC Hot side Hoses are made from:
1. High-temperature grade Silicone Rubber
2. Primed Meta-aramid fabric, which gives up to 400% better adhesion to the Silicone



Charge-Air Cooler Hose Reducer (Hot Side)

COOLMASTER 800H SERIES: CHARGE-AIR-COOLER HOSES REDUCER (HOT SIDE)											
Sr. No	Part #	Inner Diameter -1		Inner Diameter -2		Length		# of Convolutes (Humps)	# of SS rings	Max. Working Pressure (Mpa)	Max. Working Pressure (PSI)
		MM	INCH	MM	INCH	MM	INCH				
1	800H250-300	63.5	2.5	76.2	3	101.6	4	1	2	0.28	40
2	800H300-350	76.2	3	88.9	3.5	127	5	1	2	0.38	55
3	800H300-400	76.2	3	101.6	4	152.4	6	1	2	0.34	50
4	800H350-400	88.9	3.5	101.6	4	152.4	6	1	2	0.34	50
5	800H400-450	101.6	4	114.3	4.5	152.4	6	1	2	0.21	30

Note : Our CAC Hot side Hoses are made from:
1. High-temperature grade Silicone Rubber
2. Primed Meta-aramid fabric, which gives up to 400% better adhesion to the Silicone



Charge-Air Cooler Hose (Cold Side)

COOLMASTER - 800C SERIES: CHARGE-AIR-COOLER HOSES (COLD SIDE)											
Sr. No	Part #	Inner Diameter		Outer Diameter		Length		# of Convolutes (Humps)	# of SS rings	Max. working Pressure (Mpa)	Max. Working Pressure (PSI)
		MM	INCH	MM	INCH	MM	INCH				
1	800C250-060	63.5	2.5	70	2.74	152.4	6	2	3	0.41	60
2	800C300-060	76.2	3	82	3.24	152.4	6	2	3	0.41	60
3	800C350-060	88.9	3.5	95	3.74	152.4	6	2	3	0.38	55
4	800C350-075	88.9	3.5	95	3.74	190.5	7.5	2	3	0.38	55
5	800C400-060	101.6	4	108	4.24	152.4	6	2	3	0.34	50
6	800C400-065	101.6	4	108	4.24	165.1	6.5	2	3	0.34	50
7	800C400-070	101.6	4	108	4.24	177.8	7	2	3	0.34	50
8	800C400-075	101.6	4	108	4.24	190.5	7.5	2	3	0.34	50
9	800C400-080	101.6	4	108	4.24	203.2	8	2	3	0.34	50
10	800C450-060	114.3	4.5	120	4.74	152.4	6	2	3	0.31	45
11	800C500-060	127	5	133	5.24	152.4	6	2	3	0.24	35



Charge-Air Cooler Reducer (Cold Side)

COOLMASTER 800C SERIES: CHARGE-AIR-COOLER HOSES REDUCER (COLD SIDE)											
Sr. No	Part #	Inner Diameter		Inner Diameter		Length		# of Convolutes (Humps)	# of SS rings	Max. Working Pressure (Mpa)	Max. Working Pressure (PSI)
		1		2		MM	INCH				
		MM	INCH	MM	INCH						
1	800C250-300	63.5	2.5	76.2	3	101.6	4	1	2	0.41	60
2	800C300-350	76.2	3	88.9	3.5	127	5	1	2	0.38	55
3	800C300-400	76.2	3	101.6	4	152.4	6	1	2	0.34	50
4	800C350-400	88.9	3.5	101.6	4	152.4	6	1	2	0.34	50
5	800C400-450	101.6	4	114.3	4.5	152.4	6	1	2	0.21	30



Straight Turbo Sleeve

Available in 3ft length

COOLMASTER 900 SERIES: STRAIGHT TURBO SLEEVES (SILICONE – GLOSSY)

Sr. No	Part No	Hose ID		Outer Diameter		Max. Working pressure	
		MM	INCH	MM	INCH	(Mpa)	(PSI)
1	900-010	25.4	1	31.4	1.24	0.31	45
2	900-015	38.1	1.5	44.1	1.74	0.28	40
3	900-020	50.8	2	56.8	2.24	0.24	35
4	900-025	63.5	2.5	69.5	2.74	0.21	30
5	900-030	76.2	3	82.2	3.24	0.17	25
6	900-035	88.9	3.5	94.9	3.74	0.14	20
7	900-040	101.6	4	107.6	4.24	0.10	15
8	900-045	114.3	4.5	120.3	4.74	0.07	10
9	900-050	127	5	133	5.24	0.07	10
10	900-060	152.4	6	158.4	6.24	0.07	10
Note:	Our Turbo Sleeves are made from: 1. High-temperature grade Silicone Rubber 2. Primed Meta-aramid fabric, which gives up to 400% better adhesion to the Silicone						

coolMaster Hose
Cleveland Ohio

877-332-6656 | coolmasterhose.com | sales@coolmasterhose.com



turboMaster